




ID-S735 Semi-Rigid Signs

Self-Mounting Semi-Rigid Signs

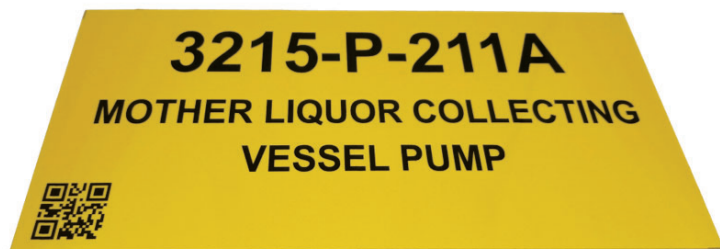

Description

- Self-mounting signs for industrial environments.
- High impact resistance & hardness
- Weather and UV resistant
- Easy installation thanks to adhesive backing

Material & Construction

Reverse printed graphics on 60 microns PC film overlaminated with 2mm thick clear solid PC + adhesive backing.

Notes

Surfaces to which the material will be applied should preferably be thoroughly cleaned from dust, grease or any contamination which could affect the adhesion of the material.

Freshly lacquered or painted surfaces should be completely cured. The compatibility of selected lacquers and paints should be tested by the user, prior to the application of the material.

Physical Characteristics

Core Material	2mm ⁱ thick clear solid PC (Polycarbonate)
Impact resistance	158J, Impact Falling Weight, ISO 6603/1
Hardness	125, Rockwell R Scale Shore, D-785
Fire Resistance	EN13501 B, s1, d0
Service Temperature	0°C to +70°C
Service Life	Outdoor: 8 Years Indoor: 20 Years
Shelf life	1 Year ⁱⁱ

ⁱ +/- 10%

ⁱⁱDue to adhesive liner

The statements in this information sheet are based upon our knowledge and practical experience. This data is intended only as a source of information and is given without guarantee and does not constitute a warranty. Due to the wide variety of possible uses and applications, customers should independently determine the suitability of this material for their specific purpose prior to use.